



伸泰國際股份有限公司


SHEN TAI SHEN TAI Electric Industry Co., Ltd.

規範書(Standard)

品名(Description): FLAT CABLE (SINGLE LAYER TYPE)

規格(Specification): 0.75MM²X24C

編號(NO): SL02-223

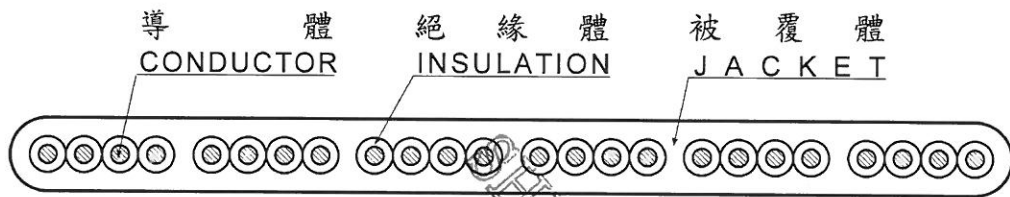

導體 (Conductor)	股數/單線徑(Core No./ Diameter)	30/0.18 mm(BC)
	外徑(Diameter)	1.14 mm
絕緣體 (Insulation)	絕緣材質(Material)	PVC (Remark)
	絕緣厚度(Thickness)	0.6 mm
	絕緣外徑(Diameter)	2.4 mm
被覆體 (Jacket)	被覆材質(Material)	PVC (Grey)
	被覆厚度(Thickness)	W:1.2mm H:0.8mm Clearance:0.5mm
	完成外徑(Diameter)	62.5X4.0 mm
最小絕緣電阻(70°C)(Minimum insulation resistance at 70°C)		0.011MΩ-km
最大導體電阻(20°C)(Maximum conductor resistance at 20°C)		26.0Ω/km
試驗電壓(Testing voltage)		2.0 KV AC/15min
印字內容(Remark): SHEN TAI ◁ VDE ▷ H05VVH6-F 0.75MM ² X24C 300/500V TÜV Rheinland CE MADE IN TAIWAN (Continuous NO. Meter)		
備註(Remark): Black with White NO.1~7 + Yellow /Green + Black with White NO.8~23		
客戶確認(Confirmed by buyer)		審核(Revised)
		製表(Applicant)

FM-0015