



# 伸泰國際股份有限公司


SHEN TAI SHEN TAI Electric Industry Co., Ltd.


## 規範書(Standard)

編號(NO):SL03-46

品名(Description):FLAT ELEVATOR CABLE (STRANDED TYPE)

規格(Specification):0.75mm<sup>2</sup>X36C

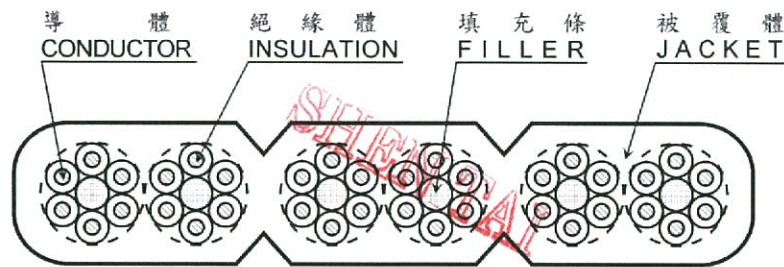

導體 (Conductor)	股數/單線徑(Core No./ Diameter)	30/0.18 mm (BC)
	外徑(Approx. Diameter)	1.14 mm
絕緣體 (Insulation)	絕緣材質(Material)	PVC (Yellow with Black NO.1~36)
	絕緣厚度(Thickness)	0.48 mm
	絕緣外徑(Approx. Diameter)	2.1 mm
被覆體 (Jacket)	被覆材質(Material)	PVC (Gray)
	被覆厚度(Thickness)	1.5 mm
	完成外徑(Approx. Diameter)	46.8 X 9.6 mm
最小絕緣電阻(20°C)(Minimum insulation resistance at 20°C)		40 MΩ-km
最大導體電阻(20°C)(Maximum conductor resistance at 20°C)		25.3 Ω/km
試驗電壓(Testing voltage)		1.5 KV AC/1min
印字內容(Marking):SHEN TAI 0.75mm <sup>2</sup> X36C YEAR (Continuous No. Meter)		
客戶確認(Confirmed by buyer)		審核(Revised) 製表(Applicant)
		 

FM-0015